Kensington®

SD5560T Thunderbolt™ 3 and USB-C Docking Station

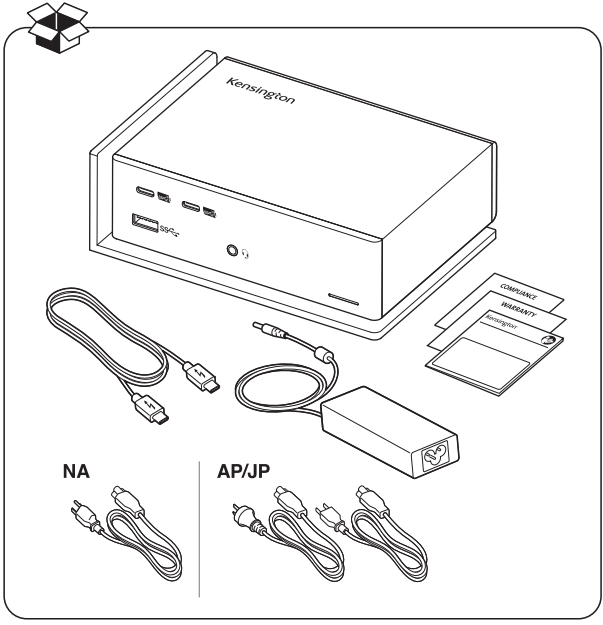

kensington.com/register

1

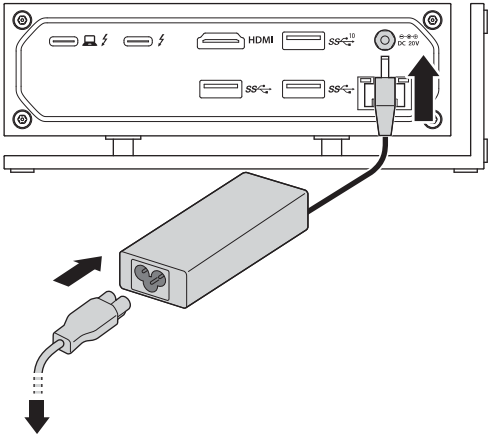

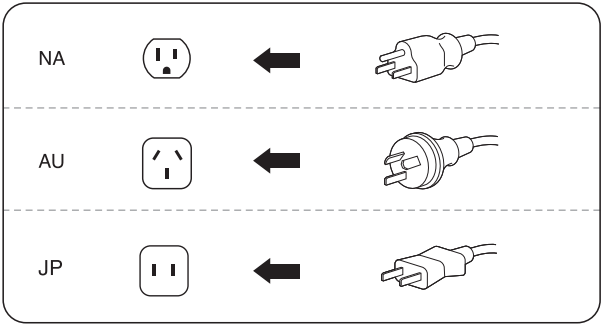

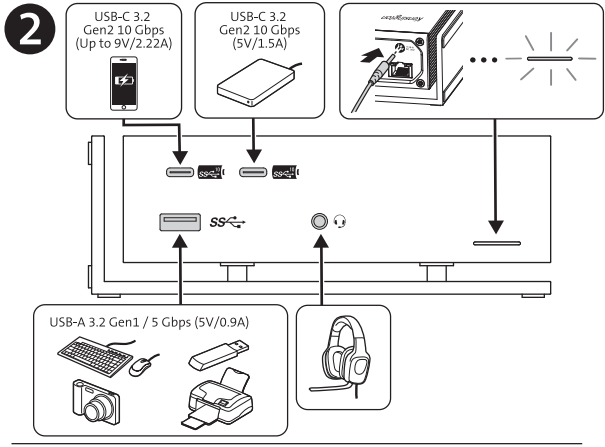
2
USB-C 3.2
Gen2 10 Gbps
(Up to 9V/2.22A)
USB-C 3.2
Gen2 10 Gbps
(5V/1.5A)
USB-A 3.2 Gen1 / 5 Gbps (5V/0.9A)

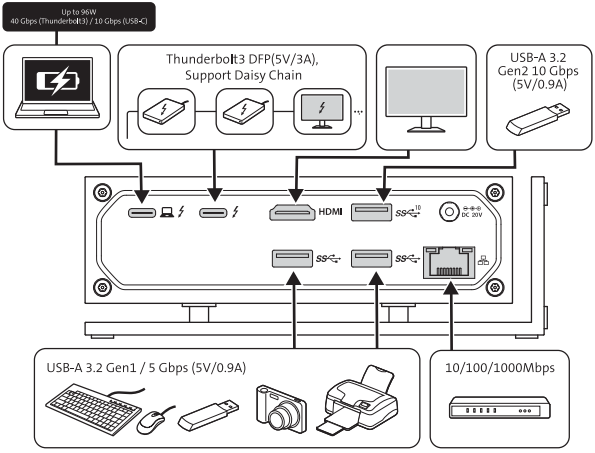
Up to 96W
40 Gbps (Thunderbolt3) / 10 Gbps (USB-C)
Thunderbolt3 DFP(5V/3A),
Support Daisy Chain
USB-A 3.2
Gen2 10 Gbps
(5V/0.9A)
HDMI
DC 20V
USB-A 3.2 Gen1 / 5 Gbps (5V/0.9A)
10/100/1000Mbps

3

a

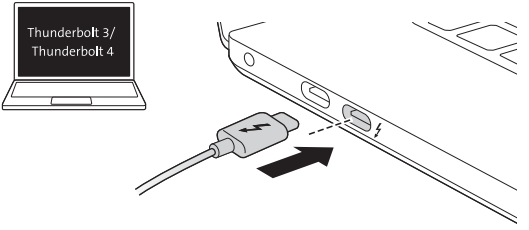

b

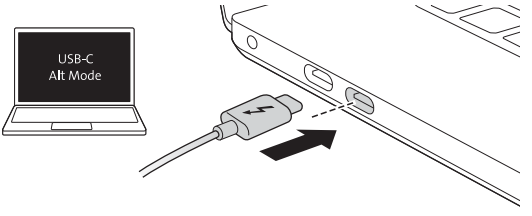

4

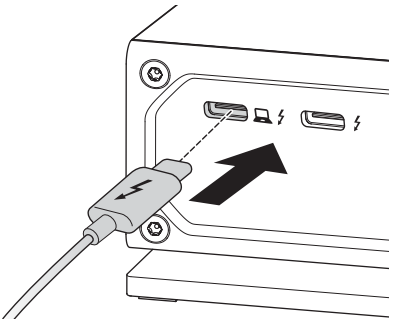

5



	1X	2X
	HDMI	HDMI
HBR2 (DP 1.2)	3840*2160 @60HZ	3840*2160 @60HZ
HBR3 (DP 1.4)	3840*2160 @60HZ	3840*2160 @60HZ



	1X
	HDMI
HBR2 (DP 1.2)	3840*2160 @30HZ
HBR3 (DP 1.4)	3840*2160 @60HZ

6 Initial Thunderbolt 3 connection for Windows

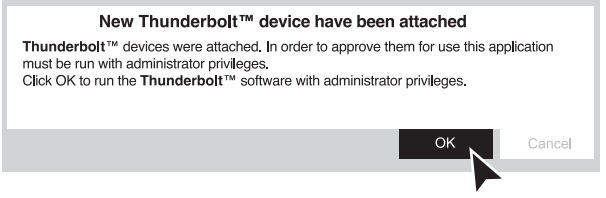

6.1 Manage Thunderbolt 3 devices and settings later

6.2

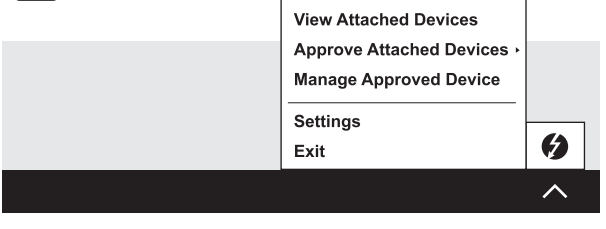

1

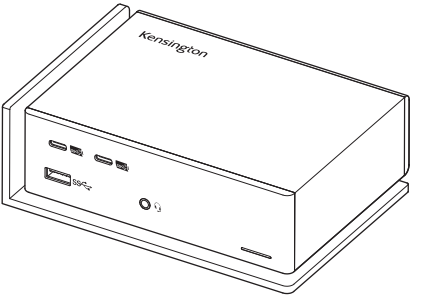

2

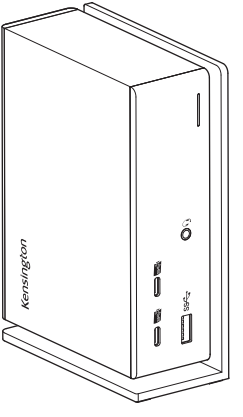

www.kensington.com/support

Kensington and the ACCO name and design are registered trademarks of ACCO Brands. All other registered and unregistered trademarks are the property of their respective owners.

©2022 Kensington Computer Products Group, a division of ACCO Brands. Any unauthorized copying, duplicating, or other reproduction of the contents hereof is prohibited without written consent from Kensington Computer Products Group. All rights reserved.

K37010

901-5400-00